




SPITZNAS
CUSTOMIZED POWER SOLUTIONS



DRILLS WITH FEED SPINDLE

TOOLS FOR THE SPECIALIST

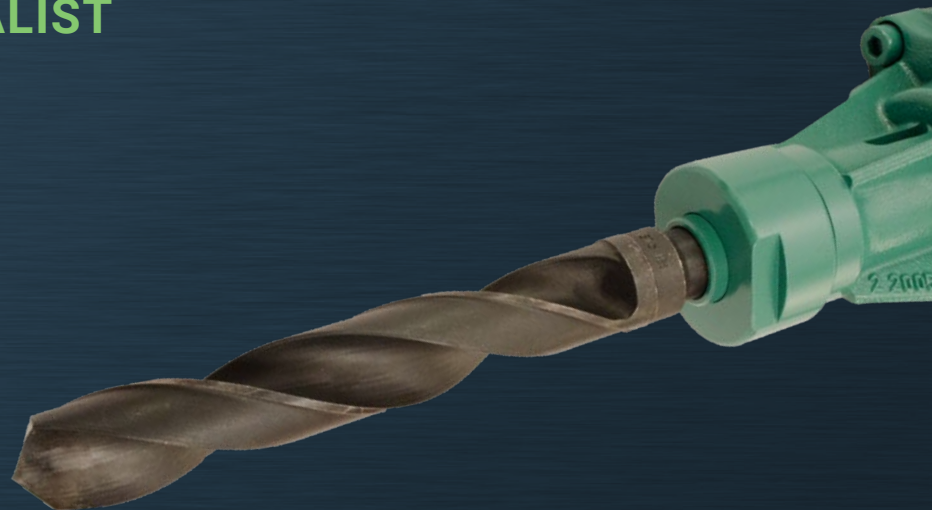

PNEUMATIC



ATEX



SYSTEM CONCEPT



Handle
with sound absorber



Safety lever valve
or safety twist throttle



Air connection



ATEX-Safety class
approved



Drill chuck



Direction of rotation right or reversible



Feed spindle with centering



PNEUMATIC

The pneumatic drill with feed spindle are available for different drilling diameter and speed, as well with direction of rotation right or reversible.



ORDER NO.	ATEX Specification	Drill chuck	Valve type	Direction of rotation	Max. drilling diameter in steel mm	Speed (under load) rpm	Power kW	Air consumption m ³ /min	Noise level LpA dB(A)	Vibration level m/s ²	Weight kg	PNEUMATIC		OPERATING PRESSURE 6 Bar		ATEX	
2 1401 0010		MT2	Safety lever valve	right	20.00	325	0.68	0.68	93.5	<2.5	5.0						
2 1401 0030		MT2	Safety twist throttle	right	20.00	325	0.68	0.68	93.5	<2.5	5.0						
2 1402 0010		MT3	Safety lever valve	right	25.00	40	0.68	0.68	93.8	<2.5	8.0						
2 1402 0030		MT3	Safety twist throttle	right	25.00	40	0.68	0.68	93.8	<2.5	8.0						
2 2502 0010	II2GExhIIBT6Gb	MT4	Safety lever valve	right/left	50.00	80	1.85	2.00	87.0	<2.5	17.2						
2 2502 0030	II2GExhIIBT6Gb	MT4	Safety twist throttle	right/left	50.00	80	1.85	2.00	87.0	<2.5	17.2						
2 2506 010	II2GExhIIBT6Gb	MT3	Safety lever valve	right/left	32.00	220	1.85	2.00	87.0	<2.5	14.7						
2 2506 0030	II2GExhIIBT6Gb	MT3	Safety twist throttle	right/left	32.00	220	1.85	2.00	87.0	<2.5	14.7						
2 2082 0010	II2GExhIIBT6Gb	MT3	Safety lever valve	right	32.00	200	1.00	1.20	92.0	3.3	12.5						
2 2082 0030	II2GExhIIBT6Gb	MT3	Safety twist throttle	right	32.00	200	1.00	1.20	92.0	3.3	12.5						
2 2084 0010	II2GExhIIBT6Gb	MT2	Safety lever valve	right	23.00	200	1.00	1.20	92.0	3.3	12.0						
2 2084 0030	II2GExhIIBT6Gb	MT2	Safety twist throttle	right	23.00	200	1.00	1.20	92.0	3.3	12.0						
2 2085 0010	II2GExhIIBT6Gb	MT2	Safety lever valve	right/left	23.00	250	1.00	1.20	92.0	3.3	12.0						
2 2085 0030	II2GExhIIBT6Gb	MT2	Safety twist throttle	right/left	23.00	250	1.00	1.20	92.0	3.3	12.0						
2 2089 0010	II2GExhIIBT6Gb	MT3	Safety lever valve	right/left	32.00	250	1.25	1.50	92.0	3.3	12.5						
2 2089 0030	II2GExhIIBT6Gb	MT3	Safety twist throttle	right/left	32.00	250	1.25	1.50	92.0	3.3	12.5						

Subject to technical change.


Performance data at an operating pressure of 6 bar.

TECHNICAL DATA

SYSTEM ACCESSORIES

SERVICE UNITS

ORDER NO.	Pos.	Description
9 2406 0260	1	Portable service unit with pressure regulator 3/4"
9 2406 0650	2	Portable service unit with protection housing and pressure regulator 3/4"



MISCELLANEOUS ACCESSORIES

ORDER NO.	Description
9 9902 0120	Multi oil for cleaning and protection



More accessories on request.

DRILL RANGE

DRILLS



IMPACT DRILLS



CORNER DRILLS



HAMMER DRILLS



CORE DILL UNITS



MAGNETIC CORE DRILLS



0721E